
FN1-031XW2200BW Range

0.30" (7.6 mm) Single Digit White 7 Segment Display



Features:

- High intensity white LED display
- Black face for maximum contrast
- White diffused segment in off-state
- Ideal for use in applications requiring the display of high definition numeric digits:
 - Audio equipment
 - ☐ Domestic appliances
 - ☐ Digital clocks

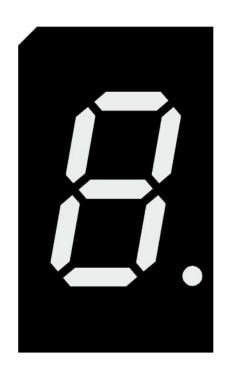

Contents:

- Electro / Optical Characteristics Page 2
- Maximum Rated Values Page 2
- Package Outline and Diagrams Page 3

FN1-031XW2200BW Range

0.30" (7.6 mm) Single Digit White 7 Segment Display



Electro / Optical Characteristics $I_F = 20$ mA, Ta = 25°C

| Part Number | | Emitting Colour | Chromaticity Coordinates | | Forward Voltage | | Luminous Intensity, Iv | |
|-----------------|-----------------|--------------------|-----------------------------|------|-----------------|------|---------------------------|-----|
| Common Cathode | Common Anode | | Х | У | Тур | Max | Min | Тур |
| FN1-0311W2200BW | FN1-0312W2200BW | White | 0.30 | 0.30 | 3.20 | 3.70 | ٧ | 55 |
| Units | | | | | V | | mcd / seg | |

Maximum Rated Values Ta = 25°C (Derate Above 25°C)

| Characteristic | Condition | Symbol | Rating | Units |
|----------------------------|---------------------------------|------------------|------------|-------|
| Pulse Forward Current | 0.1 duty cycle @ 1kHz | I _{FP} | 100 | mA |
| DC Forward Current | | l _F | 25 | mA |
| Reverse Voltage | $I_R = 10_u A$ | V_R | 5 | V |
| Operating Temperature | | T _{opr} | -25 to +80 | °C |
| Storage Temperature | | T_{stg} | -30 to +85 | °C |
| Lead Soldering Temperature | 1.6mm from body - max 3 seconds | | 260 | °C |

Note

Industry standard procedures regarding static must be observed when handling white LED displays as they are produced using blue die material.


Chromaticity coordinates to CIE 1931 Standard

FN1-031XW2200BW Range

0.30" (7.6 mm) Single Digit White 7 Segment Display




Package Outline and Diagrams

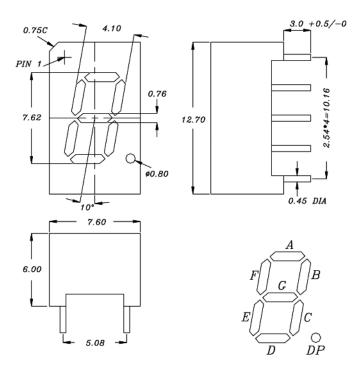


Tolerance \pm 0.25 mm unless stated

Common Cathode

Common Anode

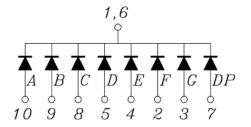



Disclaimer

No representation, warranty, responsibility or liability is or will be accepted by Forge Europa Limited in relation to the accuracy or completeness of any information it provides. It is the responsibility of the customer to verify the suitability of the product for its application. All design work supplied by Forge Europa Limited is to be assumed confidential and is the sole property of Forge Europa Limited. It must not be used, copied or disclosed to any third party without the prior written consent of Forge Europa Limited. All contracts are subject to Forge Europa Limited's General Terms and Conditions of Trading which can be found at www.forge-europa.co.uk. E&OE