

Features:


- High dot intensity
- Wide viewing angle
- Range of colours
- Grey face colour
- White dot colour

Available options:

- Alternative face colour: black
- Cropped terminal pins
- Alternative emitting colour
- Low current version
- Product can be supplied with die positions reversed

Dot layout

Product not shown
actual size

Electro / Optical Characteristics - $I_F = 20 \text{ mA}$ $T_a = 25^\circ \text{ C}$

Part Number Column Cathode	Part Number Column Anode	Emitting Colours	Wavelength Peak λ_P	Forward Voltage V_F		Luminous Intensity I_V	
				typical	max	min	typical
FND-20441LG0440GW	FND-20442LG0440GW	GaAlAs Red	660	9.25	10.00	-	-
		HE Green	573	10.50	12.00	-	-
FND-20441320GW	FND-20442320GW	HE Red	640	10.25	12.50	-	-
		Green	568	10.50	12.50	-	-
Units			nm	V		mcd / dot (matrix average)	

Maximum Ratings / Dot $T_a = 25^\circ \text{ C}$ (Derate above 25° C)


Characteristic	Condition	Symbol	Rating	Units
Pulse Forward Current	0.1 duty cycle 0.1 ms pulse width	I_{FP}	100	mA
DC Forward Current		I_F	25	mA
Reverse Voltage	$I_R = 10 \mu\text{A}$	V_R	5	V
Operating Temperature		T_{opr}	- 25 to + 80	$^\circ \text{C}$
Storage Temperature		T_{stg}	- 30 to + 85	$^\circ \text{C}$
Lead soldering temperature	1.6 mm from body - maximum 3 seconds		260	$^\circ \text{C}$

It is the responsibility of the customer to verify the suitability of the product for the application.

No representation, warranty, responsibility or liability is or will be accepted by Forge Europa Limited in relation to the accuracy or completeness of any information it provides. It is the responsibility of the customer to verify the suitability of the product for its application. All design work supplied by Forge Europa Limited is to be assumed confidential and is the sole property of Forge Europa Limited. It must not be used, copied or disclosed to any third party without the prior written consent of Forge Europa Limited. All contracts are subject to Forge Europa Limited's General Terms and Conditions of Trading which can be found at www.forge-europa.co.uk



Package Outline

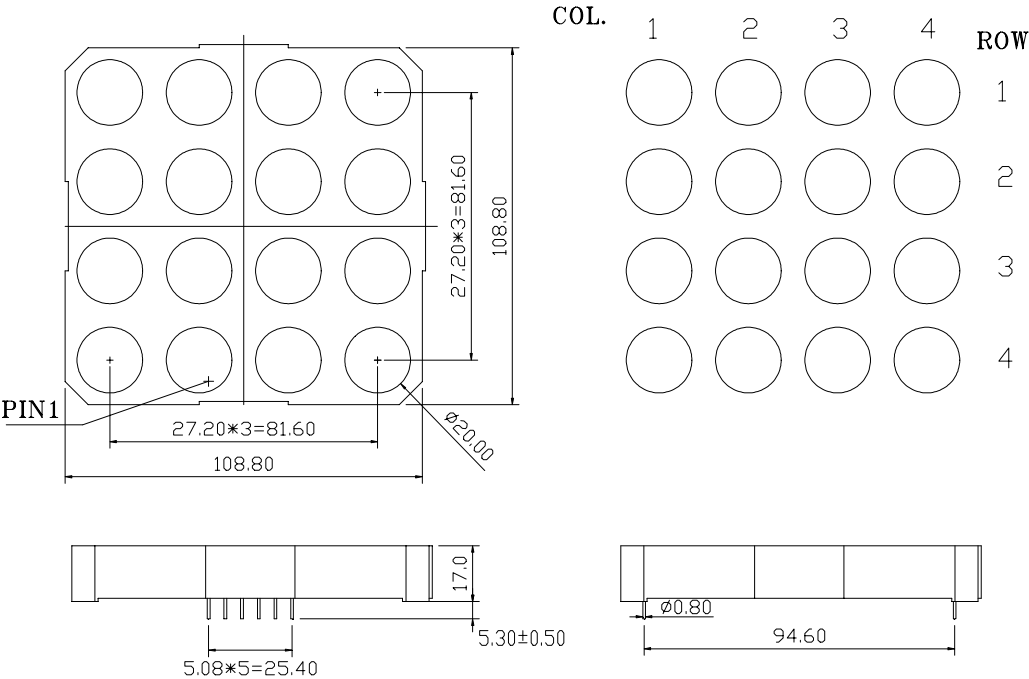


Tolerance ± 0.25 mm unless stated



Forge Limited The Old Railway, Princes Street, Ulverston, Cumbria, LA12 7NQ United Kingdom.
Tel: +44 (0)1229 580000. Email: info@forge-europa.co.uk Website: www.forge-europa.co.uk

Column Cathode

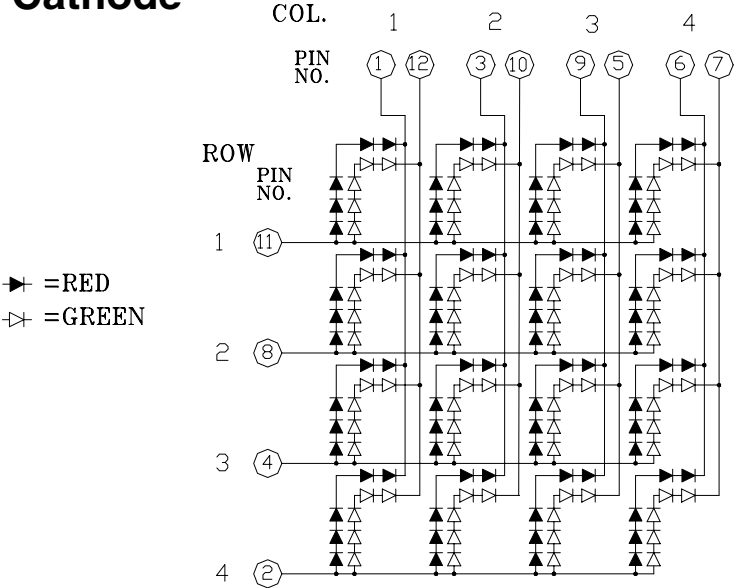

Column Anode

