FN2-080XX00GW Range

0.80" (20 mm) Standard PO Dual Digit 7 Segment Display

Features:

- High segment intensity
- Wide viewing angle
- Range of colours
- Grey face colour
- White segment colour

Available options:

- Alternative face and segment colour
- Alternative font
- Long terminal pins
- Alternative emitting colour
- Low current version

Font design

Product not shown actual size



Electro / Optical Characteristics - $I_F = 20 \text{ mA}$ (* HE Blue - $I_F = 10 \text{ mA}$) $T_a = 25^{\circ} \text{ C}$

Part Number Common Cathode	Part Number Common Anode	Emitting Colour	Wavelength Peak λ _P	Forward Voltage V _F		Luminous Intensity I _V	
				typical	max	min	typical
FN2-0801L00GW	FN2-0802L00GW	GaAlAs Red	660	1.85	2.00	-	28
FN2-0801300GW	FN2-0802300GW	HE Red	640	2.05	2.50	-	7
FN2-0801Y05300GW	FN2-0802Y05300GW	Yellow	591	2.05	2.40	-	42
FN2-0801200GW	FN2-0802200GW	Green	568	2.10	2.50	-	13
FN2-0801B0500GW	FN2-0802B0500GW	* HE Blue	465	3.70	4.00	-	9
FN2-0801B0100GW	FN2-0802B0100GW	Blue	428	3.80	4.50	-	6
Units			nm	V		mcd / seg. (digit average)	

Maximum Ratings $T_a = 25^{\circ} C$ (Derate above 25° C)

Characteristic	Condition		Symbol	Rating	Units
Pulse Forward Current	0.1 duty cycle @ 1KHz	(HE Blue)	I _{FP}	100 (35)	mA
DC Forward Current		(HE Blue)	١ _F	25 (15)	mA
Reverse Voltage $I_R = 10 \mu A$			V _R	5	V
Operating Temperature			T _{opr}	- 25 to + 80	°C
Storage Temperature			T _{stg}	- 30 to + 85	° C
Lead soldering temperature 1.6 mm from body - max 3 seconds				260	° C

Note

Industry standard procedures regarding static must be observed when handling product produced with blue die material.



Forge Limited The Old Railway, Princes Street, Ulverston, Cumbria, LA12 7NQ United Kingdom. Tel: +44 (0)1229 580000. Email: info@forge-europa.co.uk Website: www.forge-europa.co.uk No representation, warranty, responsibility or liability is or will be accepted by Forge Europa Limited in relation to the accuracy or completeness of any information it provides. It is the responsibility of the customer to verify the suitability of the product for its application. All design work supplied by Forge Europa Limited is to be assumed confidential and is the sole property of Forge Europa Limited. It must not be used, copied or disclosed to any third party without the prior written consent of Forge Europa Limited. All contracts are subject to Forge Europa Limited's General Terms and Conditions of Trading which can be found at www.forge-europa.co.uk

Issue 03


Page 1 of 2 09.15


FN2-080XX00GW Range

0.80" (20 mm) Dual Digit 7 Segment Display


Package Outline

Common Cathode

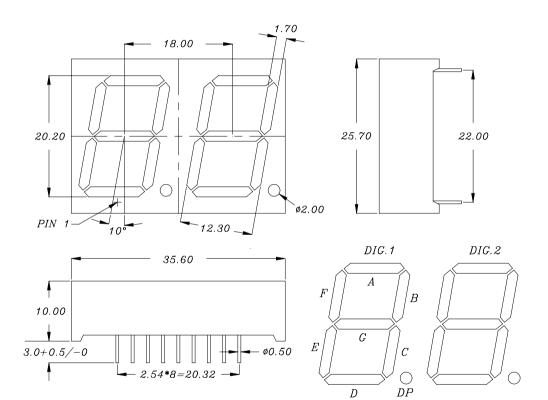

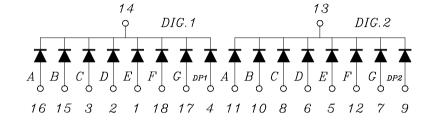

Common Anode

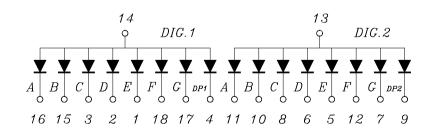

Tolerance ± 0.25 mm unless stated

Forge Limited The Old Railway, Princes Street, Ulverston, Cumbria, LA12 7NQ United Kingdom. Tel: +44 (0)1229 580000. Email: info@forge-europa.co.uk Website: www.forge-europa.co.uk No representation, warranty, responsibility or liability is or will be accepted by Forge Europa Limited in relation to the accuracy or completeness of any information it provides. It is the responsibility of the customer to verify the suitability of the product for its application. All design work supplied by Forge Europa Europa Europa Confidential and is the sole property of Forge Europa Limited. It must not be used, copied or disclosed to any third party without the prior written consent of Forge Europa Limited. All contracts are subject to Forge Europa Limited's General Terms and Conditions of Trading which can be found at www.forge-europa.co.uk

Issue 03

Page 2 of 2 09.15